
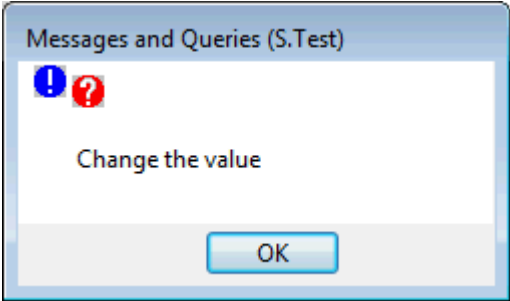


MESSAGE

MESSAGE action

Function	Message for given operator into defined process D2000 HI - with no response.		
Declaration	<div>MESSAGE strExpression [SINGLE]</div>		
	<div>MESSAGE strExpression [SINGLE] ON procIdent</div>		
	<div>MESSAGE strExpression [SINGLE] ON ALL</div>		
Parameters	strExpression	in	Expression of String type.
	procIdent	in	Identifier of a Process type object (Human Interface).
	SINGLE		Allows to display single messages in form of classic dialog box instead of a list. Multiple messages are still displayed as a list.
Description	<p>The action will show a text message (value of the expression <code>strExpression</code>) on the desktop of the defined process D2000 HI or all currently connected processes D2000 HI. If any process is not stated, the action is routed to process <code>SELF.HIP</code>.</p> <p>If you want to display a text message on the desktop of process D2000 HI from which the action is being called (active picture or connecting the event to control), you must use the second declaration of the action as follows: ON _FROM_HIP.</p>		
Example:	<p>Example of single message if "SINGLE" is used in the command.</p> <div></div> <p>Example of single message if "SINGLE" is not used in the command.</p> <div></div> <p>Selected messages may be saved into the clipboard (CTRL+C).</p>		

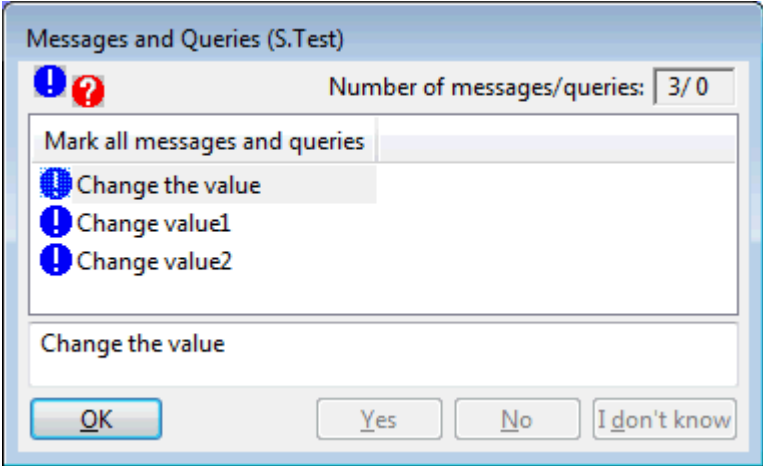

Related pages:

[Script actions](#)