


# Application Directory Structure

## Structure of D2000 application directory

Application directory is the main directory for all D2000 system applications created using the [D2000 Application Manager](#). The structure of the **application directory** of D2000 V11.00 is shown in the following figure.

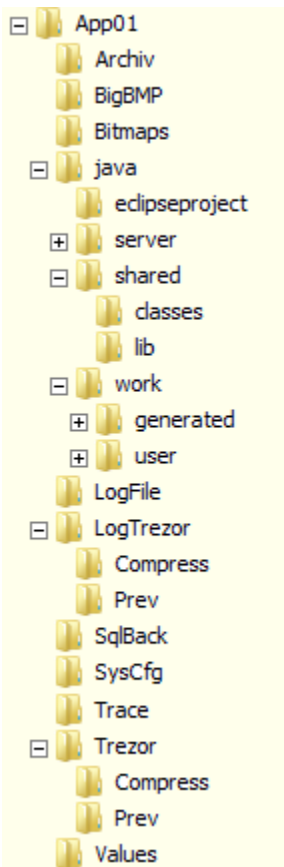

Directory	Meaning / contents
D2000.APP	Application directory of D2000 system.
D2000.APP\App01	Directory of the application - App1.
D2000.APP\App01\Archiv	Archive database - <b>archiv.db</b> .
D2000.APP\App01\BigBMP	Sizeable bitmaps (.bmp) for using as background in pictures.
D2000.APP\App01\Bitmaps	Bitmaps (.bmp) for using in pictures.
D2000.APP\App01\java\eclipseproject	Project directory for Eclipse development environment (see <a href="#">Eclipse development environment</a> ).
*) D2000.APP\App01\java\server	Working directory of D2000 Server process which the Java code is compiled in.
D2000.APP\App01\java\shared	Directory mirrored automatically on computers which the client processes of D2000 using Java are running on (the directory and its subdirectories, placed on server, are operated by the application programmers).
D2000.APP\App01\java\shared\classes	Directory containing any user Java classes to be used in applications (see <a href="#">libraries in Java</a> ).
D2000.APP\App01\java\shared\lib	Directory containing any external Java libraries to be used in applications (see <a href="#">libraries in Java</a> ).
*) D2000.APP\App01\java\work	Directory intended for work with files .java during editing of the pictures and events.

* ) D2000. APP\App01\java\work\generated	
* ) D2000. APP\App01\java\work\user	. java file representing the script will be copied into this directory when the picture or event is being opened/edited in <a href="#">D2000 GrEditor</a> or <a href="#">D2000 CNF</a> .
D2000.APP\App01\Logfile	Log database - <b>logfile.db</b> .
D2000. APP\App01\LogTrezor	Directory for log database deposits.
D2000. V40\App01\LogTrezor\Compress	Log database deposits compressed.
D2000. APP\App01\LogTrezor\Prev	Log database deposit before compression.
D2000. APP\App01\SqlBack	Default directory for backup.
D2000.APP\App01\Syscfg	Configuration database - <b>syscfg.db</b> .
D2000. APP\App01\Syscfg\Backup	Configuration database backup.
D2000.APP\App01\Trace	Text files – logs from communication process monitoring (received data, sent data, communication failures and errors, etc.).
D2000.APP\App01\Trezor	Directory of archive database deposits.
D2000. APP\App01\Trezor\Compress	Archive database deposits compressed.
D2000. APP\App01\Trezor\Prev	Archive database depository before compression.
D2000.APP\App01\Values	Database of starting values of user variables and structured variables – <b>values.db</b> .

**Note 1:** App01 is the directory of particular application. The directory name is optional.

**Note 2:** The directories marked with \*) can be considered to be temporary, i.e. they are used only when the application is running and the content of which is managed by processes of D2000 System. It does not required to copy these directories during copying of the application because they are generated / restored automatically by D2000 System at the application start and its development.

**Note 3:** If you use [an own application help](#), the application directory contains also the directory *Help* with a file of application help (.chm file).