

SetRegValue

%SetRegValue function

Function

The function writes given value into the Windows system registry.

Declaration

```
BOOL %SetRegValue(  
    TEXT in keyNameStr,  
    in Value  
)
```

Parameters

| | |
|------------|---------------------------|
| keyNameStr | Key name in the Registry. |
| Value | Value to write. |

Return value

@TRUE on success.

Note


The function will write the given value into the registry. The name of written key is *keyNameStr*. If the key does not exist, the function generates it.

There are supported the following types of values to write:

- *Bool*
- *Text*
- *Integer*

Example

In the following example, there is performed the writing the value HKEY_CURRENT_USER\Software\Microsoft\Office\9.0\Excel\Options\OPEN into the registry:

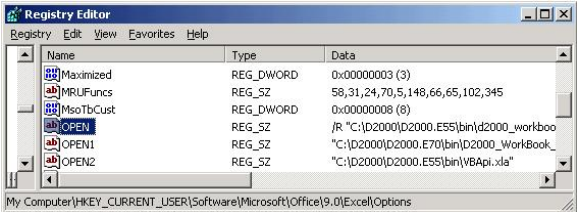

```
BOOL _bok  
_bok := %SetRegValue( "HKEY_CURRENT_USER\Software\Microsoft\Office\9.  
0\Excel\Options\OPEN", "hodnota" )
```

- Related topics
- [%GetDefaultRegValue](#)
[%GetRegValue](#)
[%SetDefaultRegValue](#)

Related pages:

[Implemented functions](#)
[Function arguments - types](#)