

SetRegValue

%SetRegValue function

Function

The function writes given value into the Windows system registry.

Declaration

```
BOOL %SetRegValue(
    TEXT in keyNameStr,
    in Value
)
```

Parameters

keyNameStr	Key name in the Registry.
Value	Value to write.

Return value

@TRUE on success.

Note


The function will write the given value into the registry. The name of the written key is *keyNameStr*. If the key does not exist, the function generates it.

The following types of values to write are supported:

- *Bool*
- *Text*
- *Integer*

Example

In the following example, the writing the value HKEY_CURRENT_USER\Software\Microsoft\Office\9.0\Excel\Options\OPEN into the registry is performed:

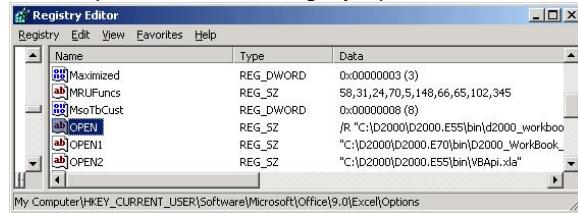

```
BOOL _bOk
_bOk := %SetRegValue( "HKEY_CURRENT_USER\Software\Microsoft\Office\9.0\Excel\Options\OPEN", "hodnota" )
```

Related topics

[%GetDefaultRegValue](#)
[%GetRegValue](#)
[%SetDefaultRegValue](#)



Related pages:

[Implemented functions](#)
[Function arguments - types](#)