


XML Repository settings

Parameters for [XML Repository](#) are shared by all the processes running on the computer.

The parameters can be set by the following processes:

- [D2000 CNF](#) - main menu, an item **System \ XML Repository settings ...**

The following window opens:

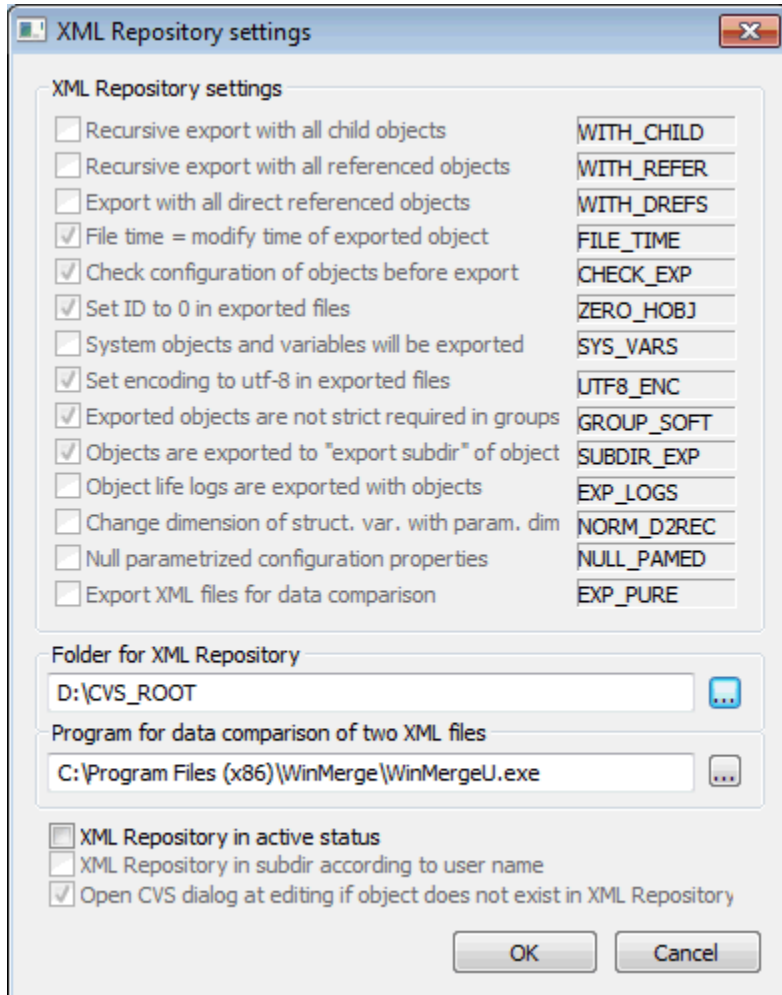

The screenshot shows a Windows-style dialog box titled "XML Repository settings". It contains a list of 15 settings, each with a checkbox and a corresponding value in a text box. The settings are:

| Setting | Value |
|--|------------|
| <input type="checkbox"/> Recursive export with all child objects | WITH_CHILD |
| <input type="checkbox"/> Recursive export with all referenced objects | WITH_REFER |
| <input type="checkbox"/> Export with all direct referenced objects | WITH_DREFS |
| <input checked="" type="checkbox"/> File time = modify time of exported object | FILE_TIME |
| <input checked="" type="checkbox"/> Check configuration of objects before export | CHECK_EXP |
| <input checked="" type="checkbox"/> Set ID to 0 in exported files | ZERO_HOBJ |
| <input type="checkbox"/> System objects and variables will be exported | SYS_VARS |
| <input checked="" type="checkbox"/> Set encoding to utf-8 in exported files | UTF8_ENC |
| <input checked="" type="checkbox"/> Exported objects are not strict required in groups | GROUP_SOFT |
| <input checked="" type="checkbox"/> Objects are exported to "export subdir" of object | SUBDIR_EXP |
| <input type="checkbox"/> Object life logs are exported with objects | EXP_LOGS |
| <input type="checkbox"/> Change dimension of struct. var. with param. dim | NORM_D2REC |
| <input type="checkbox"/> Null parametrized configuration properties | NULL_PAMED |
| <input type="checkbox"/> Export XML files for data comparison | EXP_PURE |

Below the list, there are two sections:

- Folder for XML Repository**: A text box containing "D:\CVS_ROOT" with a browse button (three dots).
- Program for data comparison of two XML files**: A text box containing "C:\Program Files (x86)\WinMerge\WinMergeU.exe" with a browse button (three dots).

At the bottom, there are three checkboxes:

- ☐ XML Repository in active status
- ☐ XML Repository in subdir according to user name
- ☒ Open CVS dialog at editing if object does not exist in XML Repository

At the very bottom are "OK" and "Cancel" buttons.

XML Repository settings

Sets the export parameters for [XML Repository](#). The parameters are set to required values.

Folder for XML Repository

Text box to insert the full path.

Program for data comparison of two XML files

Sets the program which will compare data of two XML files.

XML Repository in active status

If the option is checked off the object will be automatically exported into directory for XML Repository after each saving of the object configuration or after [import of the object](#) from the client process.
The functionality for [XML Repository](#) is activated.

XML Repository in subdir according to user name

If the option is checked off the object will not be exported directly into directory for XML Repository, but into its subdirectory which name is the same as the name of user.

This option is available only when the option **XML Repository in active status** is checked off.

Open CVS dialog at editing if object does not exist in XML Repository

If the option is checked off, the CVS information window will open although the object does not exist in [XML Repository](#).

This option is available only when the option **XML Repository in active status** is checked off.

Button

Selection of the directory.

Click on the button **OK** to accept the settings.



Related pages:

[D2000 XML](#)

[XML Repository](#)

[Export parameters](#)