

FIND_FILES

FIND_FILES action

Function The action allows to find a file or directory in the defined directory.

Declaration

```
FIND_FILES directory, mask, bRecursive, filesDesc, retCode
```


Parameters

directory	in	Existing directory, where to find. TEXT type.																								
mask	in	Name of the file or directory you want to look for. It can contains the characters * and ?. TEXT type.																								
bRecursive	in	BOOLEAN type. <ul style="list-style-type: none">@TRUE - find recursively in subdirectories@FALSE - find just in defined directory																								
filesDesc	in	Local structure of SD_System_FileInfo type or other structure definition consisting of the same column count and types. <table border="1"><thead><tr><th>Name</th><th>Type</th><th>Description</th></tr></thead><tbody><tr><td>IsFile</td><td>Boolean</td><td>@TRUE, if a file was found (otherwise it's a directory).</td></tr><tr><td>CreateTime</td><td>Abs. time</td><td>Time when the file or directory was created.</td></tr><tr><td>AccessTime</td><td>Abs. time</td><td>For a file, it is the time when the file was last read from or written to. For a directory, the structure specifies when the directory was created.</td></tr><tr><td>ModifyTime</td><td>Abs. time</td><td>For a file, it is the time when the file was last written to. For a directory, it is the time when the directory was created.</td></tr><tr><td>Size</td><td>Real</td><td>File size in bytes.</td></tr><tr><td>Name</td><td>Text</td><td>File name.</td></tr><tr><td>Attribs</td><td>Integer</td><td>File (directory) attributes.</td></tr></tbody></table>	Name	Type	Description	IsFile	Boolean	@TRUE, if a file was found (otherwise it's a directory).	CreateTime	Abs. time	Time when the file or directory was created.	AccessTime	Abs. time	For a file, it is the time when the file was last read from or written to. For a directory, the structure specifies when the directory was created.	ModifyTime	Abs. time	For a file, it is the time when the file was last written to. For a directory, it is the time when the directory was created.	Size	Real	File size in bytes.	Name	Text	File name.	Attribs	Integer	File (directory) attributes.
Name	Type	Description																								
IsFile	Boolean	@TRUE, if a file was found (otherwise it's a directory).																								
CreateTime	Abs. time	Time when the file or directory was created.																								
AccessTime	Abs. time	For a file, it is the time when the file was last read from or written to. For a directory, the structure specifies when the directory was created.																								
ModifyTime	Abs. time	For a file, it is the time when the file was last written to. For a directory, it is the time when the directory was created.																								
Size	Real	File size in bytes.																								
Name	Text	File name.																								
Attribs	Integer	File (directory) attributes.																								
retCode	output	Return code.																								

Return code The value of the parameter *retCodeIdent_Int* - see the table of [error codes](#).

Description The action allows you to find the specified file (directory) within the given directory. The action finds and fill the result into the structure **filesDes**. The structure **filesDesc** contains a list of files and directories matching the given search condition. If needed, the action resize the structure. If no file match the given condition (mask), the result structure will consists of 0 rows. The structure **filesDesc** is updated only when *retCode* acquires the value "0" (ERR_NO_ERROR).

Example

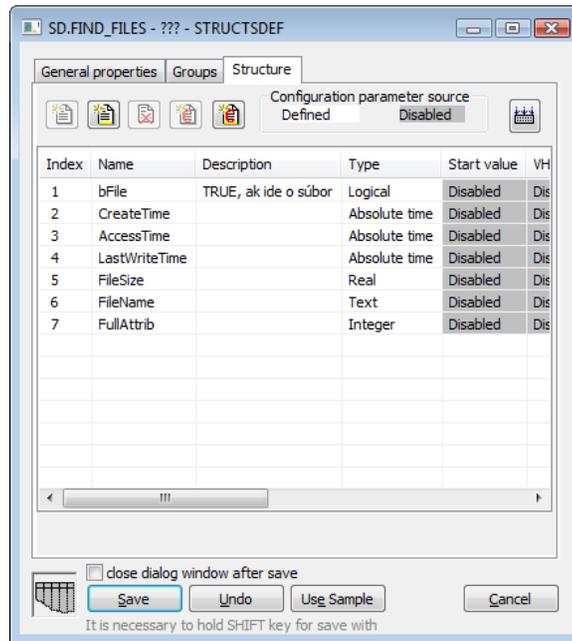

```
RECORD (SD.ESL_FIND_FILES) _dir
  INT _retCode

BEGIN
  FIND_FILES "c:\directory", "*", @TRUE, _dir, _retCode
END
```

i Related pages:

[Script actions](#)